

Copper Lug, AWG 6#, one hole 3/8", Nylon-insulated,blue

- Copper cable lugs are designed for connecting copper cables, coils and Bus-bars .
- Copper Terminals between 0.15mm2 & 240mm2 have bell entry to ensure easy entry even for flexible conductors.
- Internal barrel serrations assure good wire contact and maximum tensile strength.
- Brazed seam protects terminal barrel from splitting during the crimp process.
- "colour code" help choose the right connector.




Product Classification

Item Number	6008342
Part Number	-
Detail Description	Copper Lug, AWG 6#, one hole 3/8", Nylon-insulated,blue

General Specifications

Color Code	Blue
Material	Copper
Tongue Type	Ring
Surface	Tin-plated

Dimensions

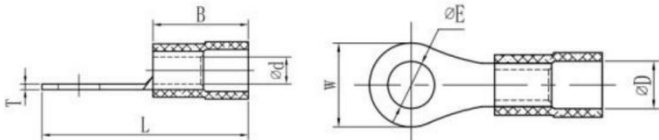

Bolt Size	0.41 in 10.5 mm
Tang Width (W)	0.71 in 18.0 mm
Barrel length (B)	0.91 in 23.0 mm
Overall length (L)	1.77 in 45.0 mm
Inner diameter (d)	0.23 in 5.9 mm
Outer diameter (D)	0.38 in 9.7 mm

Electrical Specifications

Rating - Maximum Voltage	35KV
--------------------------	------

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
-----------------------	-------------------------------------



Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)
---------------------	--------------------------------------

Packaging and Weights

Included	Lug
Packaging Quantity and UOM	Kit of 10
Piece Weight	0.06 lb 0.03 kg

Certifications and Compliance

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant

