

Copper Lug, AWG 16-14#, one hole M4, Nylon-insulated,Blue

- Copper cable lugs are designed for connecting copper cables, coils and Bus-bars .
- Copper Terminals between 0.15mm2 & 240mm2 have bell entry to ensure easy entry even for flexible conductors.
- Internal barrel serrations assure good wire contact and maximum tensile strength.
- Brazed seam protects terminal barrel from splitting during the crimp process.
- "colour code" help choose the right connector.




Product Classification

| | |
|--------------------|---|
| Item Number | 6009356 |
| Part Number | - |
| Detail Description | Copper Lug, AWG 16-14#, one hole M4, Nylon-insulated,blue |

General Specifications

| | |
|-------------|------------|
| Color Code | Blue |
| Material | Copper |
| Tongue Type | Ring |
| Surface | Tin-plated |

Dimensions

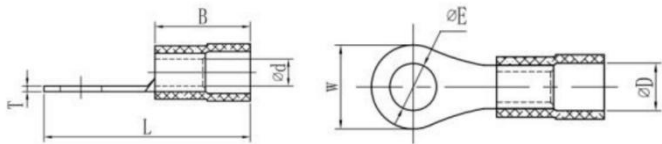

| | |
|--------------------|-------------------|
| Bolt Size | M4 4.3 mm |
| Tang Width (W) | 0.26 in 6.6 mm |
| Barrel length (B) | 0.44 in 11.3 mm |
| Overall length (L) | 0.81 in 20.7 mm |
| Inner diameter (d) | 0.09 in 2.3 mm |
| Outer diameter (D) | 0.18 in 4.6 mm |

Electrical Specifications

| | |
|--------------------------|------|
| Rating - Maximum Voltage | 35KV |
|--------------------------|------|

Environmental Specifications

| | |
|-----------------------|-------------------------------------|
| Operating Temperature | -40 °C to +90°C (-40 °F to +212 °F) |
|-----------------------|-------------------------------------|

| | |
|---------------------|--------------------------------------|
| Storage Temperature | -40 °C to +80 °C (-40 °F to +176 °F) |
|---------------------|--------------------------------------|

Packaging and Weights

| | |
|----------------------------|-------------------|
| Included | Lug |
| Packaging Quantity and UOM | Kit of 10 |
| Piece Weight | 0.06 lb 0.03 kg |

Certifications and Compliance

| | |
|---------------|--|
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system |
| RoHS | Compliant |

