


90° Copper Lug, AWG 2/0#FLEX, two hole 1/4", hole spacing 3/4", with inspection window, black

- Copper cable lugs are designed for connecting copper cables, coils and Bus-bars.
- Copper Tube Terminals between 6mm<sup>2</sup> & 800mm<sup>2</sup> have bell entry to ensure easy entry even for flexible conductors.
- Incorporates inspection window to check the correct cable positioning.
- "colour code" help choose the right connector, the colour name is also printed in order to avoid problems for those who are colour-blind.
- 90 degree standard barrel for limited space applications.

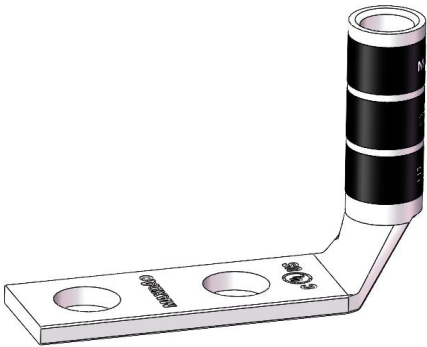


Product Classification

Item Number	6009363
Part Number	-
Detail Description	90° Copper Lug, AWG 2/0#FLEX, two hole 1/4", hole spacing 3/4", with inspection window, black

General Specifications

Colour Code	Black
Material	Copper
Tongue Type	Standard
Tongue Angle	90 degree
Surface	Tin-plated
Inspection Window	With inspection window

Dimensions

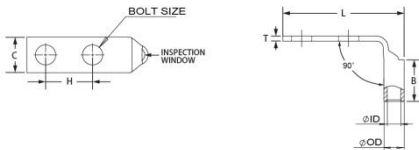

Bolt Size	1/4 in   6.9 mm
Hole Spacing (H)	3/4 in   19.0 mm
Tang Width (C)	0.92 in   23.3 mm
Barrel length (B)	1.00 in   25.4 mm
Overall length (L)	2.40 in   61.0 mm
Inner diameter (ID)	0.51 in   12.9 mm
Outer diameter (OD)	0.63 in   16.0 mm

Electrical Specifications

For more information, please visit:  
[www.maxdao.com](http://www.maxdao.com)



©Maxdao Inc. All rights reserved.  
The information contained herein is subject to change without notice. We reserve the right to make technical changes or modify the contents of this document without prior notice.  
Revised: Sep 26, 2024  
Public

Rating - Maximum Voltage	35KV
--------------------------	------

Environmental Specifications

Operating Temperature	-40 °C to +90°C (-40 °F to +212 °F)
Storage Temperature	-40 °C to +80 °C (-40 °F to +176 °F)

Packaging and Weights

Included	Lug
Packaging Quantity and UOM	1 pcs
Piece Weight	0.099 lb   0.045 kg

Certifications

ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
RoHS	Compliant
UL	Compliant

